
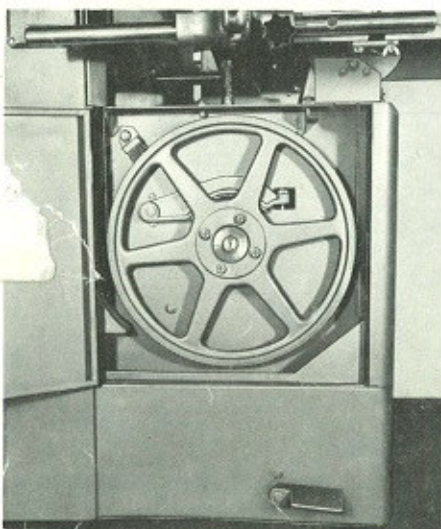


**Wadkin  
Bursgreen**

# **BZB 500**

## **Vertical Bandsaw**

This machine has been designed to provide efficient Band sawing at the lowest possible cost. Although the smallest and least expensive of the famous Bursgreen range of Band saws, it has all the mechanical features and rigidity that guarantee clean, accurate sawing and long working life. Engineered on sound principles, its construction, allied with the many unique design features have resulted in an exceptionally smooth, free running machine. It is capable of the best class of sawing with a large cutting capacity. To the operator the convenience of access for saw changing, the enclosed working parts entailing the minimum of attention and maintenance, and the all round ease and convenience of operation makes it a very attractive machine to use.

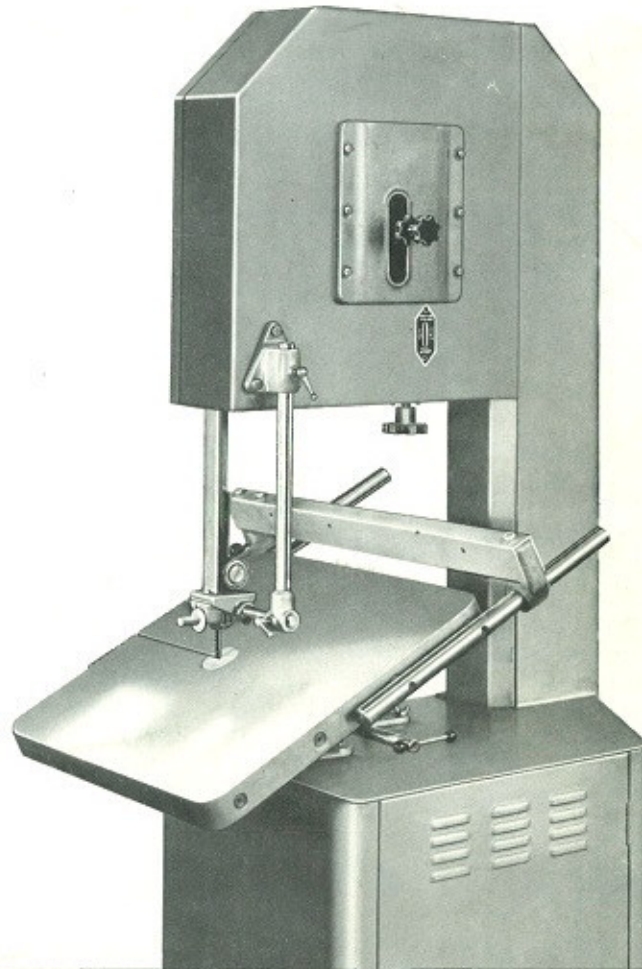

Powerful foot operated brake acts on bottom saw pulley for bringing machine quickly to rest. Brush keeps pulley rim free from dust.


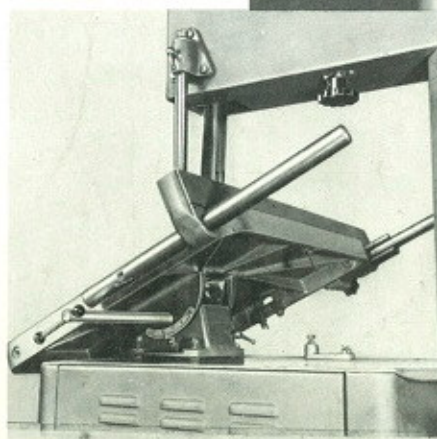


Table cants 45° to right and 10° to the left on a quadrant. Locking handle is brought out to side of table for convenient operation. Scale indicates angle of cant. Adjustable stop locates table at horizontal position.

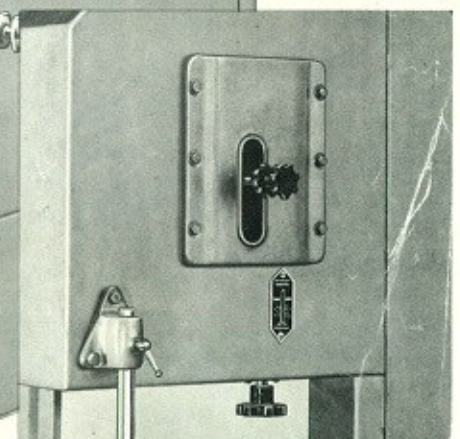

Convenient hand wheel blade tension and tracking adjustments for correct saw setting. Scale indicates tension for varying widths of saws.

**The Main Frame** is a built up fabricated steel unit having a large foot area for stability. Two sheet steel access doors completely enclose the machine and blade (except for the portion being used) when the machine is in operation.

**The Saw Pulleys** are made from high grade aluminium alloy and are accurately machined and balanced for true running. They are detachable and interchangeable and fitted with rubber tyres securely vulcanised to the rims. The top wheel revolves on sealed type ball bearings which require no lubrication throughout their entire and very long life. Top wheel adjustment is by handwheel and screw, whilst correct tension to the blade is ensured by the spring loaded slide which is also arranged to cant for tracking purposes. The bottom wheel is securely locked and keyed to the motor shaft on standard model machines. An efficient foot operated brake is fitted, which brings the wheels quickly to rest and with a minimum amount of effort. To keep the rubber tyre free from accumulating sawdust, an adjustable brush is fitted to the bottom wheel. A saw tension indicator is fitted to show correct blade tension.

**The Dust Chute** is provided in the base of the main frame and is designed to keep the machine free from an accumulation of sawdust in all circumstances and is also most convenient for connecting to a dust extraction plant if desired.

### Specification

Diameter of saw pulleys	20in	500mm
Width of saw pulleys	1½in	40mm
Maximum width of saw	1in	25mm
Maximum length of saw	12ft 9in	3890mm
Minimum length of saw	12ft 2in	3700mm
Maximum depth under saw guide	13in	330mm
Distance saw to body	19½in	495mm
Size of table	22 x 24in	560 x 610mm
Table cants	45° to right 10° to left	
Height of table from floor	38in	965mm
Overall height of machine	79in	2000mm
Speed of saw	5210ft/min	1590m/min
Horsepower of motor	2hp	1.5kW
Speed of motor, (50 hertz)	1000rev/min	1000rev/min
Floor space	28 x 40in	710 x 1015mm
Net weight	670 lb	300kg
Gross weight	920 lb	420kg
Shipping dimensions	53ft³	1.5m³

**The Canting Table** is of unusually large proportions for a 20in (500mm) machine, being 22 x 24in (560 x 610mm) and surface ground to a high finish. It is arranged to cant up to 45° to right and 10° to left from the horizontal. A graduated scale and efficient hand lever lock are provided.

**The Drive.** The motor for all three phase supplies is of 2hp totally enclosed fan cooled, and is enclosed in the base of the machine. A 3hp motor is available as an extra. The bottom saw wheel is directly keyed to the motor shaft thus obviating the need for a belt drive. This motor is controlled by a push button operated direct on contactor starter complete with no-volt and overload releases which is conveniently mounted near the operating position.

**The Fence** with rapid adjustment by hand and fine adjustment by small handwheel can be supplied at extra cost and may be fitted on either side of the saw blade.

**The Saw Guides** are of completely new advanced design and are fitted above and below the table. These are supplied with a special runner spindle assembly to give support to the back of the blade, and are also fitted with adjustable side rollers to give maximum support to the sides of the blade. The upper saw guide is vertically adjustable to the thickness of timber being worked.

**Wadkin  
Bursgreen**

### SALES

#### WADKIN LTD.

Green Lane Works, Leicester LE5 4PF, England  
Telephone: 0533 769111 Telex: 34646 (Wadkin G)  
Telegrams & Cables: Woodworker, Leicester, Telex

And at York House, Empire Way, Wembley, Middx. HA9 0PA  
Telephone: 01-902 7714 (3 lines) Telex: 262210

### SERVICE

BURSGREEN machines are manufactured by:  
**BURSGREEN (DURHAM) LTD.**  
Fence Houses, Houghton-le-Spring,  
Tyne and Wear  
**BURSGREEN (COLNE) LTD.**  
Lodge Holme, Trawden, Nr. Colne, Lancs.

As our policy is constantly to improve the design of Bursgreen woodworking machinery, the details given in this leaflet are not to be regarded as binding.